

Leak detector spray

- ▶ DVGW tested
- ▶ Professional quality

Features


- ▶ For control and leak detection
- ▶ Easy handling
- ▶ Many applications
- ▶ Non-toxic - Eco-friendly
- ▶ Skin-friendly
- ▶ Incombustible
- ▶ Anti-corrosive
- ▶ Operating range from +5° C to +40° C
- ▶ 360° valve technology

Benefits of use

- ▶ Effortless, time-saving search
- ▶ Fast and reliable diagnosis
- ▶ Leaks are shown with foam
- ▶ Position-independent function

Areas of application

- ▶ Finds leaks easily in under pressure pipes, fittings, flange connections, and welds
- ▶ Checks gas and compressed air valves, welding and soldering equipment, braking systems, breathing apparatus, Bunsen burners, camping cookers, air tanks, gas and pneumatic connections, water heaters, fire extinguishers, bottle batteries, gas stoves, gas filling systems, gas heaters, rubber tires, air conditioning and refrigeration equipment, air mattresses, air compressors, diving equipment etc.

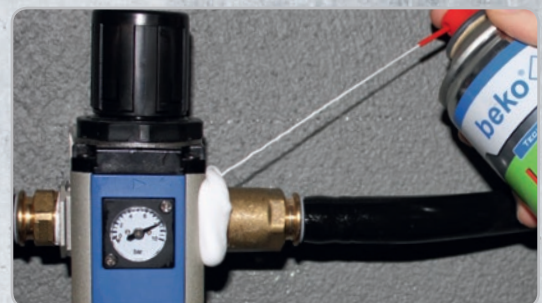

Leak detector spray

Content 400 ml
Art.-No. 296 1 400

Range of use

- ▶ Automotive companies and industry
- ▶ Metal and engineering
- ▶ Compressed air system
- ▶ Plumbing trades
- ▶ Industry
- ▶ Gas suppliers

Directions for use

Shake can well before use. Uncover the spots you want to test and put pressure on the pipes. Spray the **TecLine leak detector spray** at a distance of 30 to 50 cm. A leak is indicated by a lot of foam forming. Clean the plastic pipes with water after testing.

Caution

- ▶ Must not be used for testing oxygen pipes!
- ▶ No dangerous compounds are formed with carbon dioxide (CO₂), propane, butane, acetylene, compressed air, natural and town gas, nitrogen, nitrous oxide (N₂O) and fluorocarbon.
- ▶ In the case of incorrect or improper application, any product warranty becomes void.
- ▶ For professional and industrial use only.
- ▶ Please observe safety data sheet!

Technical Data

Basis	water		
Temperature	resistant from +5° C up to +40° C		
Processable	from +5° C up to +40° C		
Colour	white		
Smell	odourless		
Density	approx. 1 g/cm ³		
pH value	± 7,0		
Viscosity	low viscosity		
Storage life	up to 5 years		
Storage	not over +40° C, dry		
Contents/packaging	Can 500 ml / Content 400 ml	12 pcs/box	840 pcs/pallet