

Silicone acetate

Sanitary silicone

- ▶ Acetic acid curing
- ▶ Professional quality

Features


- ▶ Easy handling
- ▶ Resistant to ageing
- ▶ High adhesion
- ▶ Permanently elastic
- ▶ Contains fungicide (anti-fungal)
- ▶ Available in many colours

Benefits of use

- ▶ Minimum wastage
- ▶ Is easily smoothed
- ▶ Easy to work with
- ▶ Very well suited for repairs

Areas of application

- ▶ Glazings
- ▶ Waterproof
- ▶ Repairs
- ▶ In the sanitary area
- ▶ Connection joints

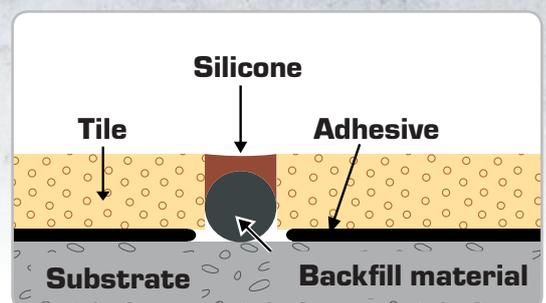

Silicone acetate

Sanitary silicone

Content 310 ml
Art.-No. 225 xxEN

Range of use

- ▶ Assemblers
- ▶ Glaziers
- ▶ Plumbing trades
- ▶ Woodworking
- ▶ Construction Industry

Directions for use

For proper sealing correct joint dimensions and an appropriate pre-treatment are necessary. Apply **beko silicone acetate** with edge pressure into the joint. Then smooth with **beko smoothing agents** and joint spatula. Because of the variety of different substrates an adhesion test is recommended before application. For optimal joint dimension please read the IDV sheet nr.: 27 section 8.1. In order to prevent three-sided adhesion, use backfill material.

Caution

- ▶ Adhesive surfaces must be clean, grease and dry, if necessary, clean with **beko Allclean**.
- ▶ Tar and bituminous substrates are not suitable as a bonding surface.
- ▶ Use a primer if there is poor adhesion.
- ▶ Do not treat the surface with aggressive cleaners.
- ▶ Do not use on galvanized metal and non-ferrous metals.
- ▶ During processing and curing ensure sufficient ventilation.
- ▶ In the case of incorrect or improper application, any product warranty becomes void.
- ▶ For professional and industrial use only.

Technical data

Basis	Silicone rubber, acetate curing		
Processable	from +5° C to max. +40° C		
Temperature	resistant from -50° C up to +150° C		
Skin formation time	approx. 10 minutes (+23° C/50% relative air humidity)		
Curing	2 mm/day (+23° C/50% relative air humidity)		
Density	0,97 - 1,00 g/cm ³		
Shore A hardness	approx. 25		
Permanent movement absorption	max. 25%		
Tensile strength	0,5 N/mm ²		
Resilience	approx. 90%		
Paintable	Not paintable. Paint compatibility within Rosenheim Guidelines		
Storage life	12 months (unopened)		
Storage	at +5° C to +30° C; dry		
Contents/packaging	20 pcs/box	1200 pcs/pallet	
Order numbers/colours	225 01EN transparent 225 05EN concrete grey 225 13EN silver grey	225 02EN white 225 07EN bahama beige	225 04EN manhattan 225 10EN black